Assembly - Attaching the Light Kit

10 Attaching the light kit

CAUTION: To reduce the risk of electric shock, disconnect the electrical supply circuit to the fan before installing the light fixture.

- ☐ Remove the four screws on the black bracket of the fan-motor assembly (D).
- ☐ Connect the wires exiting the bottom of the black bracket with the light kit fitter assembly by connecting the molded adaptor connectors together.
- ☐ Secure the light kit fitter assembly to the black bracket using the four screws that were removed in the first step above.

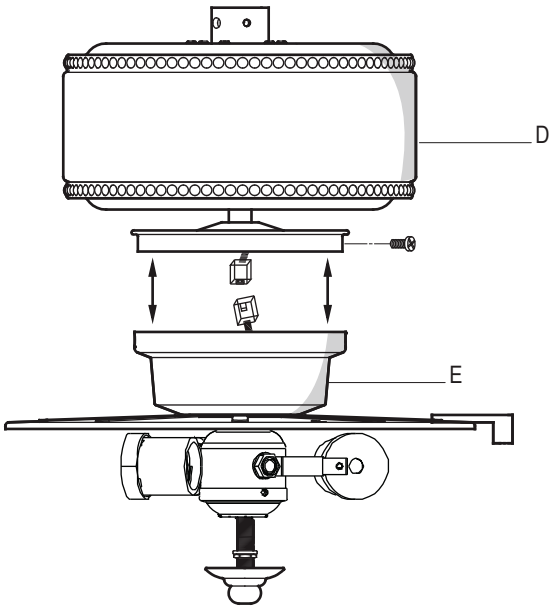

11 Installing the bulbs and attaching the glass bowl

- ☐ Remove the rubber washer, hex nut, and finial from the light kit fitter assembly.
- ☐ With power off, install the three bulbs (K) (Max. 14W, included) by screwing into the light bulb sockets.
- ☐ Position the glass bowl (I) over the threaded nipple and pass the pull chain (FF) for the fan through the pull chain guide on the side of the light kit fitter assembly to avoid the chain from touching the glass bowl.
- ☐ Re-install the rubber washer and hex nut to the threaded nipple to secure the glass bowl (I) properly.
- ☐ Re-install the finial.

CAUTION: Do not over tighten the hex nut, overtightening the hex nut may cause the glass to break.

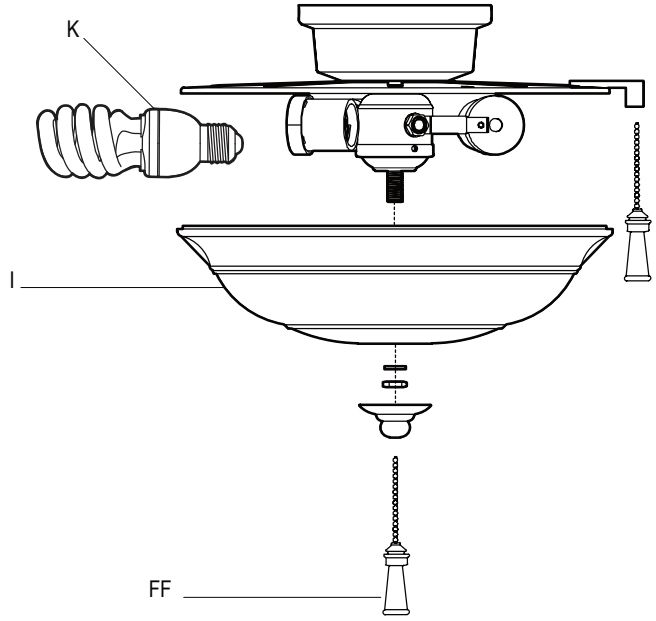

NOTE: Notice the location of the fan's slide switch. This is the switch used to change the fan's directional rotation. For more information on the operation of this switch, see Operating Your Fan and Remote Control on page 12.

Ensamblaje – Cómo Unir los Accesorios

10 Cómo montar el juego de luces

PRECAUCIÓN: Para disminuir el riesgo de descarga eléctrica, desconecta el circuito de energía del ventilador antes de instalar la lámpara.

- ☐ Afloja los cuatro tornillos de la cubierta de la caja del interruptor (E) del ensamblaje del motor (D).
- ☐ Conecta los cables que salen del fondo de la placa negra con el ensamblaje del juego de luces/caja del interruptor, uniendo los conectores con adaptadores moldeados.
- ☐ Asegura el ensamblaje del juego de luces/caja del interruptor a la placa negra mediante los cuatro tornillos que quitaste en el paso uno.

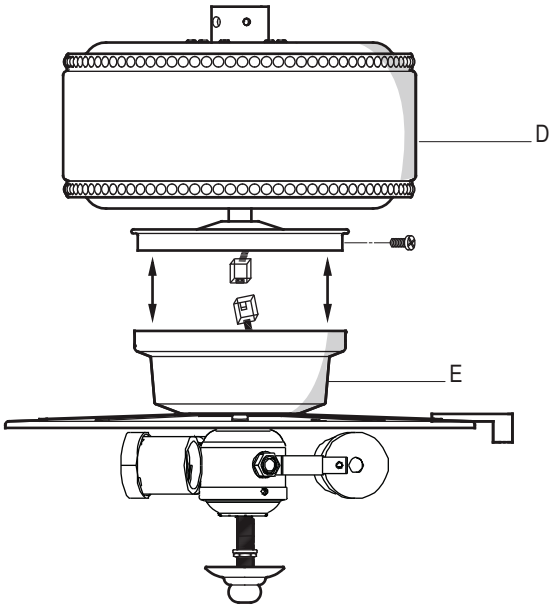

11 Cómo instalar los focos y colocar el tazón de vidrio

- ☐ Retira la arandela de goma, la tuerca hexagonal y el ensamblaje del ensamblaje del juego de luces/caja del interruptor.
- ☐ Con el ventilador apagado, instala los tres focos (K) (de 14 W Máximo, incluidas) ajustándolas en los portafocos.
- ☐ Coloca el tazón de vidrio (I) sobre la boquilla enroscada y pasa la cadena del interruptor (FF) del ventilador a través del orificio guía en el lado del ensamblaje del juego de luces/caja del interruptor para evitar que toque el tazón de vidrio.
- ☐ Reinstala la arandela de goma y la tuerca hexagonal en la boquilla enroscada para asegurar el tazón de vidrio (I) correctamente.
- ☐ Reinstala el remate.

CAUTION: No aprietes demasiado la tuerca hexagonal. Si lo haces, podría quebrarse el vidrio.

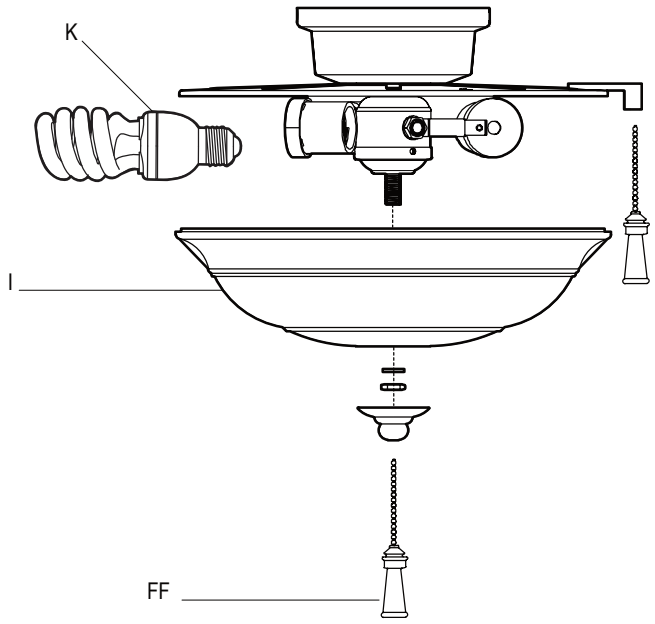

NOTE: Nota la ubicación del interruptor deslizable del ventilador. Este interruptor se usa para cambiar la rotación direccional del ventilador. Para más información sobre la operación del interruptor, consulta las Instrucciones para Operar el Interruptor Deslizable en la página 12.